



RAYO Industries

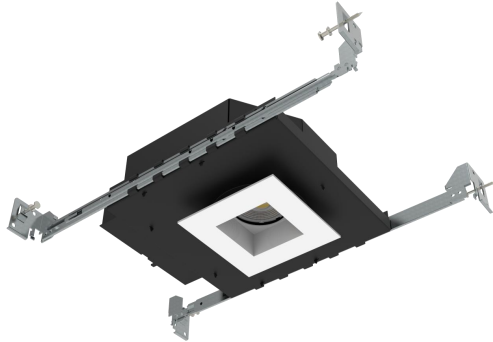

RRC3-M-S-2 | TRIMMED

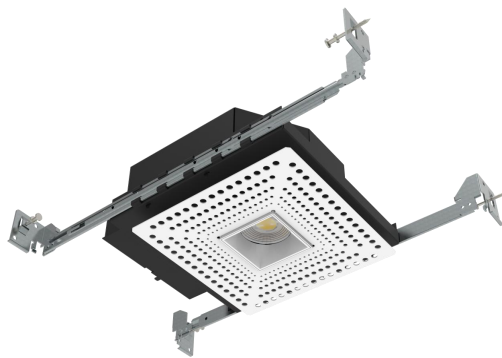

RRC3-M-S-2-TL | TRIMLESS

SPECIFICATIONS	
MOUNTING	RECESSED
OPTICS	12°/24°/36°
CRI	80/90+
CCT	2700/3000/3500/4000 K
SUITABLE LOCATION	DAMP
WARRANTY	5 YEARS
DIMMABLE	NONE/TRIAC/0~10V
MAXIMUM WATTAGE	12/15/20W
VOLTAGES	120V/277V



Phone: 818-877-0344 | Email: sales@rayoindustries.com | www.rayoindustries.com

Project	
Project Name	
Fixture Location	
Date	

DESCRIPTION

- Shallow new construction LED downlight.

FEATURES

- Accommodates ceiling thickness 1/2".
- Meet the new thinnest LED housing in the world, measuring less than 3" tall from top too bottom.

DIMENSIONS

