

RAYO Industries



RRC4011-D1



RRC4012-D1



RRC4013-D1



RRC4014-D1



RRC4014-D1-S

SPECIFICATIONS

FINISH	BLACK/WHITE
MOUNTING	RECESSED
CRI	80/90+
CCT	2700/3000/4000/5000 K
OPTICS	12/24/36°
SUITABLE LOCATION	DAMP
WARRANTY	5 YEARS
DIMMABLE	YES
MAXIMUM WATTAGE	16W/LAMP
VOLTAGES	120V/277V
LUMEN EFFICIENCY	100LM/W



Project

Project Name	
Fixture Location	
Date	


DESCRIPTION

- Commercial retractable LED COB multiple downlight.

FEATURES

- offered in 4 configurations: 1/2/3/4 lights
- Luminaire can accommodate up to 1" ceiling thickness.
- Luminaire is supplied with butterfly brackets to allow up -to 3" vertical adjustment.
- Trim, housing and junction box are 20 gauge steel.

DIMENSIONS

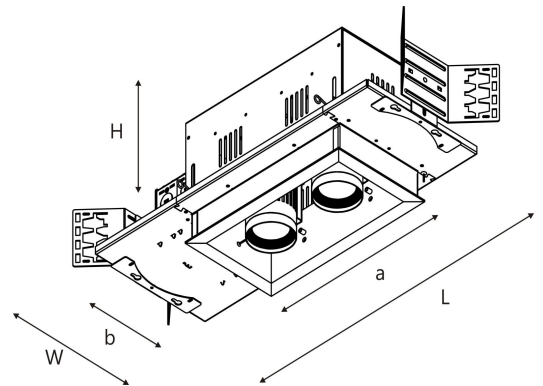

1x1 SPOTS

L: 15 7/8" x W: 8 9/16" x H: 7 11/16"

Cut-Out(axb): 6 1/4" x 6 1/4"

1x2 SPOTS

L: 21 1/8" x W: 8 9/16" x H: 7 11/16"

Cut-Out(axb): 11 1/4" x 6 1/4"

1x3 SPOTS

L: 26 1/4" x W: 8 9/16" x H: 7 11/16"

Cut-Out(axb): 16 5/8" x 6 1/4"

1x4 SPOTS

L: 31 5/16" x W: 8 9/16" x H: 7 11/16"

Cut-Out(axb): 21 3/4" x 6 1/4"

2x2 SPOTS

L: 21" x W: 8 9/16" x H: 7 11/16"

Cut-Out(axb): 11 7/16" x 11 7/16"