


# RAYO Industries



RRCL6-VA

SPECIFICATIONS	
MOUNTING	RECESSED
CRI	80/90+
CCT	2700/3000/3500/4000 K
SUITABLE LOCATION	DAMP
WARRANTY	5 YEARS
DIMMABLE	YES
MAXIMUM WATTAGE	20/25/30W
VOLTAGES	120V/277V
LUMEN	1600/2000/2400 lm

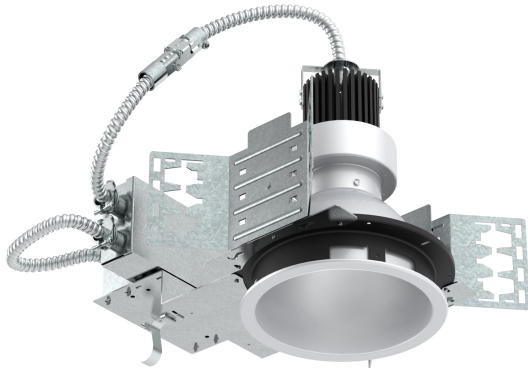

Project	
Project Name	
Fixture Location	
Date	

## DESCRIPTION

- 6" architectural LED downlight.

## FEATURES

- Available with dedicated Emergency Battery Back-up
- Provide with 4 1/2" knockouts, 1 3/4" knockouts and four romex knockouts with true pryout slots and strain clamps.
- The reflector assembly is held in with 4 "butter-fly" spring clips.
- Compatible with C-channel, flat bar wood joist bar hanger and EMT.
- The LED driver is mounted to the J-box cover and is accessible from below the ceiling.

## DIMENSIONS

