

# RAYO Industries



RU LED 3ST | Surface Mounted



RU LED 3ST | Suspended Mounted

SPECIFICATIONS	
MOUNTING	SURFACE/SUSPENDED
CRI	80/90+
CCT	2700-6500K
SUITABLE LOCATION	WET
WARRANTY	5 YEARS
DIMMABLE	None/0~10V/TRIAC
MAXIMUM WATTAGE	30W
VOLTAGES	120V/277V/120V~277 V AC
BEAM ANGLE	100°



Phone: 818-877-0344 | Email: sales@rayoindustries.com | www.rayoindustries.com

Project	
Project Name	
Fixture Location	
Date	

## DESCRIPTION

- It's a high lumen, thin, beautiful appearance, safe and reliable convenient installation and easy maintenance linear light.

## CONSTRUCTION

- Die formed, 22gauge, cold rolled steel designed for high strength. End caps snap in for easy installation and maintenance.
- In addition, the end cap can be used as a joint aligner for continuous row mounting.

## LIGHT SOURCE

- Using the energy-saving highlighting 2835 SMD LED light source.


## DRIVER

- Using isolation constant-current driver power, is the guarantee of security, stability and no flicking.

## APPLICATION

- Suit for the garage, warehouse, basement and car parks and other places to provide general illumination.

## DIMENSIONS

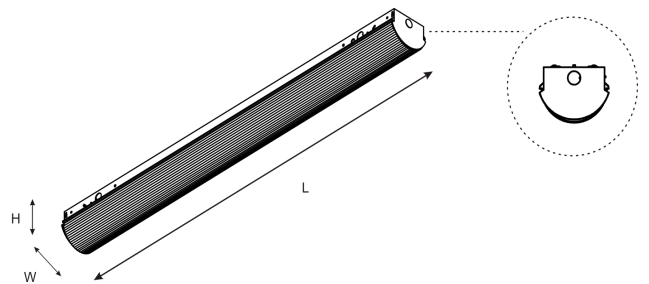

W: 4 7/8"

H: 3 5/6"

L: 3FT