



Removable
Can be replaced with
different mounting parts
of multiple installation

RU LED 20FLO



In-ground
Mounting



Suspension
Mounting



Tree Hanging
Mounting

SPECIFICATIONS	
CRI	80/90+
CCT	3000/4500/6000K
SUITABLE LOCATION	DAMP
WARRANTY	5 YEARS
LED QTY	48 PCS
MAXIMUM WATTAGE	20W
VOLTAGES	AC 120V
IP RATING	IP65



Project	
Project Name	
Fixture Location	
Date	

DESCRIPTION

- Ultra-thin 3CCT LED flood light.


FEATURES

- Ultra-thin streamlined external light design.
- 4mm tempered clear glass, light transmittance up to 95%.
- High density die casting aluminum lamp body.
- Unique touch switch dimming function: 3CCT (3000K/4500K/6000K).
- Unique outdoor wall switch color temperature control function: 3CCT (3000K/4500K/6000K).

MOUNTING

- In-ground Mounting
- Suspension Mounting
- Tree Hanging Mounting

DIMENSIONS

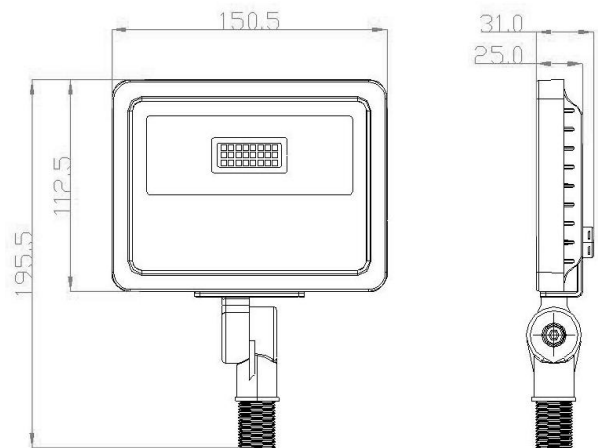

L=112.5mm W=150mm H=31mm