

# RAYO Industries



RRC4011-A



RRC4012-A



RRC4013-A



RRC4014-A



RRC4014-A-S

## SPECIFICATIONS

FINISH	BLACK/WHITE
MOUNTING	RECESSED
CRI	80/90+
CCT	2700/3000/4000/5000 K
OPTICS	12/24/36°
SUITABLE LOCATION	DAMP
WARRANTY	5 YEARS
DIMMABLE	YES
MAXIMUM WATTAGE	20W/LAMP
VOLTAGES	120V/277V
LUMEN EFFICIENCY	100LM/W



## Project

Project Name	
Fixture Location	
Date	


## DESCRIPTION

- Commercial LED multiple downlight.

## FEATURES

- All parts and components accessible from below the ceiling.
- Extruded trim frame includes torsion springs for convenient installations or removal from the housing.
- Optional mud frame available for trimless mounting.
- The perforated mesh frame provided adheres to joint compound for seamless and trimless mounting.

## DIMENSIONS

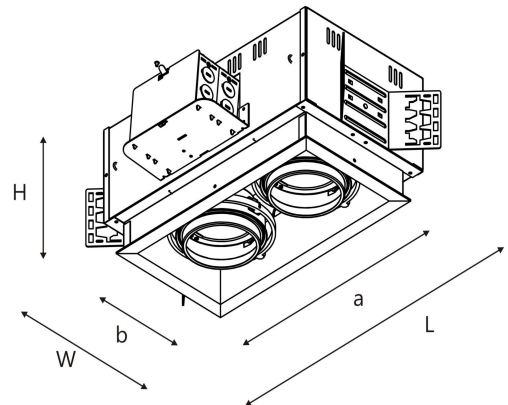

### 1x1 SPOTS

L: 13 1/8"xW: 12 3/16"xH: 7 9/16"  
Cut-Out(axb): 7 9/16" x 7 9/16"

### 1x2 SPOTS

L: 19 1/2"xW: 12 3/16"xH: 7 9/16"  
Cut-Out(axb): 13 9/16" x 7 9/16"

### 1x3 SPOTS

L: 26 3/16"xW: 12 3/16"xH: 7 9/16"  
Cut-Out(axb): 20 1/2" x 7 9/16"

### 1x4 SPOTS

L: 31 7/16"xW: 12 3/16"xH: 7 9/16"  
Cut-Out(axb): 26 13/16" x 7 9/16"

### 2x2 SPOTS

L: 21"xW: 20 3/16"xH: 7 5/8"  
Cut-Out(axb): 14 7/16" x 14 7/16"