



RAYO Industries

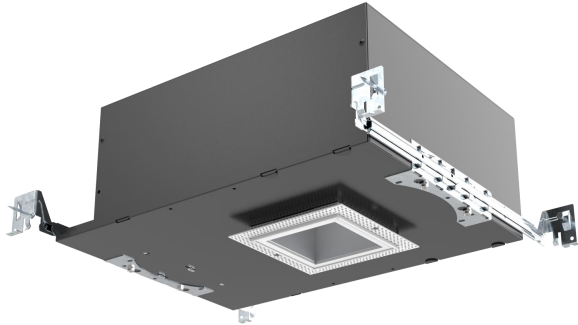

RRC35-M-S-2 | New construction

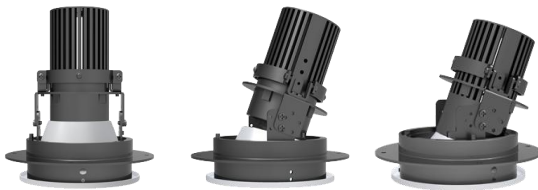

Vertical

Adjustable

Wall Wash

*Achieve 3 functions through changing screw pieces and replacing matched reflectors.

SPECIFICATIONS	
MOUNTING	RECESSED
OPTICS	12°/24°/36°
CRI	80/90+
CCT	2700/3000/3500/4000 K
EMERGENCY OPTION	AVAILABLE
SUITABLE LOCATION	INSULATED CEILING & DAMP LOCATION
WARRANTY	5 YEARS
DIMMABLE	NONE/TRIAC/RD 0~10V
MAXIMUM WATTAGE	10W
VOLTAGES	120V/277V/120-277V
LUMEN EFFICIENCY	100lm/W



Project	
Project Name	
Fixture Location	
Date	


DESCRIPTION

- 3.5" square COB LED shallow recessed downlight kits.

FEATURES

- Standard housing accommodates 1/2" ceiling thickness.
- Heavy duty black powder coated cold roll steel frame.
- Separable rotating reflector design makes it easy for replacement.
- Housing types include IC Air-Tight or Non-IC Rated.
- 12° Spot, 24° Narrow Flood and 36° Flood.

DIMENSIONS

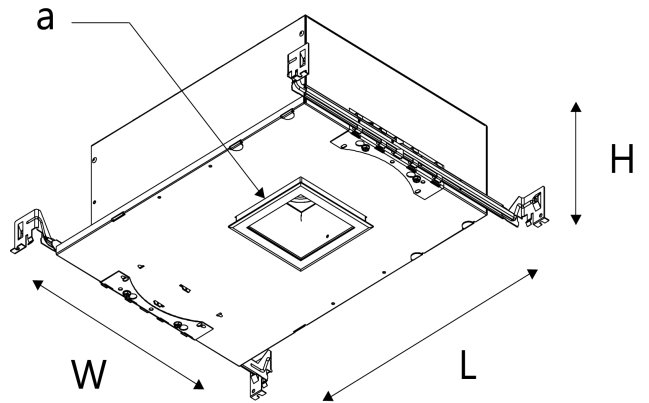

L: 15 3/8"

W: 11 5/16"

H: 4 7/8"

a: 4 1/16"