


RAYO Industries




RRC35-M-2 | New construction



Vertical



Adjustable



Wall Wash

*Achieve 3 functions through changing screw pieces and replacing matched reflectors.

SPECIFICATIONS	
MOUNTING	RECESSED
OPTICS	12°/24°/36°
CRI	80/90+
CCT	2700/3000/3500/4000 K
EMERGENCY OPTION	AVAILABLE
SUITABLE LOCATION	INSULATED CEILING & DAMP LOCATION
WARRANTY	5 YEARS
DIMMABLE	NONE/TRIAC/RD 0~10V
MAXIMUM WATTAGE	10W
VOLTAGES	120V/277V/120-277V
LUMEN EFFICIENCY	100lm/W



Phone: 818-877-0344 | Email: sales@rayoindustries.com | www.rayoindustries.com

Project	
Project Name	
Fixture Location	
Date	


DESCRIPTION

- 3.5" round COB LED shallow recessed downlight kits.

FEATURES

- Standard housing accommodates 1/2" ceiling thickness.
- Heavy duty black powder coated cold roll steel frame.
- Separable rotating reflector design makes it easy for replacement.
- Housing types include IC Air-Tight or Non-IC Rated.
- 12° Spot, 24° Narrow Flood and 36° Flood.

DIMENSIONS

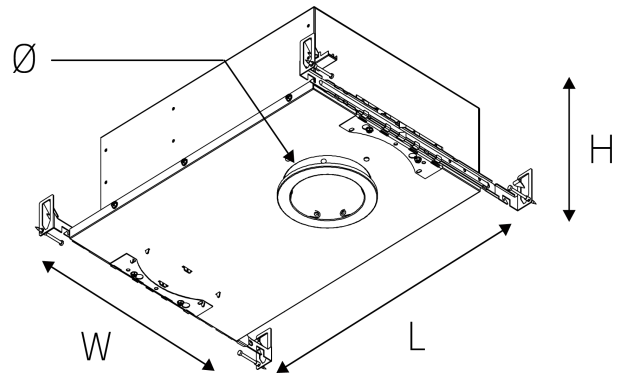

L: 16 9/16"

W: 11 5/16"

H: 4 5/8"

φ: 4"