



RU LED 10FLO

Removable  
Can be replaced with  
different mounting parts  
of multiple installation



In-ground  
Mounting



Suspension  
Mounting



Tree Hanging  
Mounting

SPECIFICATIONS	
CRI	80/90+
CCT	3000/4500/6000K
SUITABLE LOCATION	DAMP
WARRANTY	5 YEARS
LED QTY	24 PCS
MAXIMUM WATTAGE	10W
VOLTAGES	AC 120V
IP RATING	IP65



Project	
Project Name	
Fixture Location	
Date	

### DESCRIPTION

- Ultra-thin 3CCT LED flood light.


### FEATURES

- Ultra-thin streamlined external light design.
- 4mm tempered clear glass, light transmittance up to 95%.
- High density die casting aluminum lamp body.
- Unique touch switch dimming function: 3CCT (3000K/4500K/6000K).
- Unique outdoor wall switch color temperature control function: 3CCT (3000K/4500K/6000K).

### MOUNTING

- In-ground Mounting
- Suspension Mounting
- Tree Hanging Mounting

### DIMENSIONS

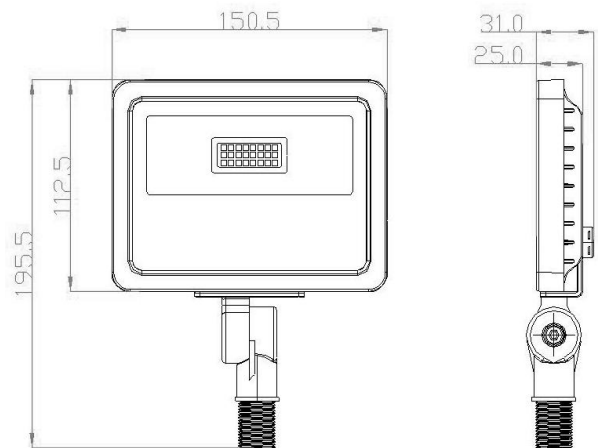

L=112.5mm W=150mm H=31mm