


RFRJ4-F-O | New Construction



SPECIFICATIONS	
MOUNTING	RECESSED
FIRE RATING	2 HOURS
CRI	80+/90+
PF	>0.95

LISTING

UL listed to US and Canadian standards for damp location W/Feed through. IC Rated, Title 24 compliant
UL 263 certificated up to 2 hour fire rated.



Project	
Project Name	
Fixture Location	
Date	

DESCRIPTION

- 4" fire and sound rated downlight housing.

FEATURES

- Ultra-thin new construction fire rated junction box.
- Designed for surface mount ceiling fixtures.
- Cold plate housing sprayed with red powder for 2 hour fire rated.


HOUSING

- Fire and sound rated housing, up to 120 minute fire rated L500(floor-ceiling) & P500(roof-ceiling) design.
- Die formed cool steel construction. Snap on cool steel cover. Non-combustible matt insulation.

JUNCTION BOX

- 4 in 4 out galvanized steel junction box.

DIMENSIONS

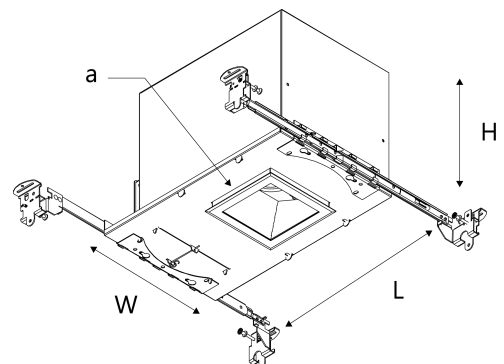

L: 12 1/16"

W: 7 1/2"

H: 7 3/4"

a: 4 1/16"

Designed for 2" x 8" joist construction