


RFRJ4-F-S | New Construction



SPECIFICATIONS	
MOUNTING	RECESSED
FIRE RATING	2 HOURS
CRI	80+/90+
PF	>0.95

**LISTING**

UL listed to US and Canadian standards for damp location W/Feed through. IC Rated, Title 24 compliant UL 263 certificated up to 2 hour fire rated.



Project	
Project Name	
Fixture Location	
Date	

**DESCRIPTION**

- 4" fire and sound rated downlight housing.

**FEATURES**

- Ultra-thin new construction fire rated junction box.
- Designed for surface mount ceiling fixtures.
- Cold plate housing sprayed with red powder for 2 hour fire rated.


**HOUSING**

- Fire and sound rated housing, up to 120 minute fire rated L500(floor-ceiling) & P500(roof-ceiling) design.
- Die formed cool steel construction. Snap on cool steel cover. Non-combustible matt insulation.

**JUNCTION BOX**

- 4 in 4 out galvanized steel junction box.

**DIMENSIONS**

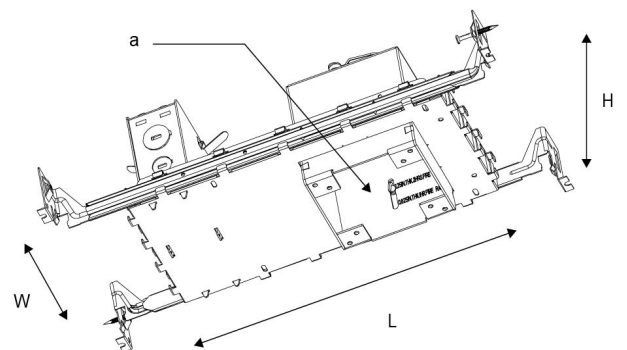

- L: 10 1/2"
  - W: 5 3/16"
  - H: 3 13/16"
  - a: 3 3/4" x 3 3/4"
- Designed for 2" x 8" joist construction