


RAYO Industries

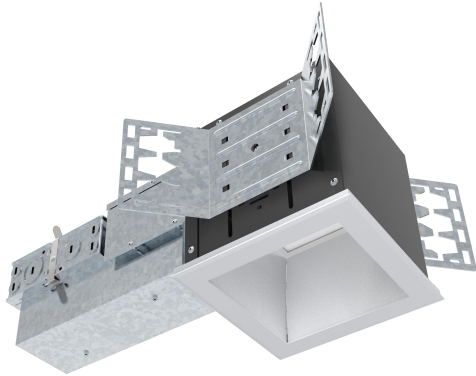

RRCL4-FS

Project	
Project Name	
Fixture Location	
Date	

DESCRIPTION

- 4" architectural square LED downlight.

FEATURES

- Isolated power supply, safe and without flicker.
- Point light source emitting turned into spherical light emitting.
- Locating part, easy to installation, will not cause abnormal phenomena such as deformation.

SPECIFICATIONS	
MOUNTING	RECESSED
CRI	80/90+
CCT	2700/3000/3500/4000 K
SUITABLE LOCATION	DAMP
WARRANTY	5 YEARS
DIMMABLE	NONE/0~10V
MAXIMUM WATTAGE	12/18/24W
LUMEN	960/1440/1920lm
VOLTAGES	120V/277V/120-277V
PF	>0.98
BEAM ANGLE	60°, 90° OPTIONAL

DIMENSIONS

