


RAYO Industries

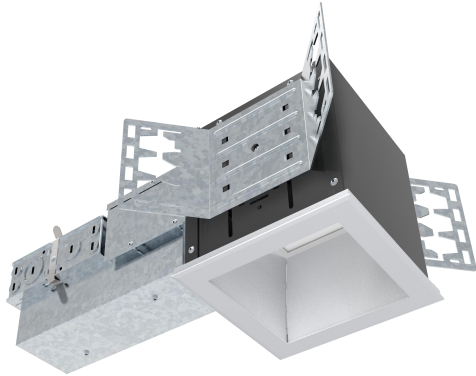

RRCL6-FS

| Project | |
|------------------|--|
| Project Name | |
| Fixture Location | |
| Date | |

DESCRIPTION

- 6" architectural square LED downlight.

FEATURES

- Isolated power supply, safe and without flicker.
- Point light source emitting turned into spherical light emitting.
- Locatung part, easy to installation, will not cause abnormal phenomena such as deformation.

| SPECIFICATIONS | |
|-------------------|-----------------------|
| MOUNTING | RECESSED |
| CRI | 80/90+ |
| CCT | 2700/3000/3500/4000 K |
| SUITABLE LOCATION | DAMP |
| WARRANTY | 5 YEARS |
| DIMMABLE | NONE/0~10V |
| MAXIMUM WATTAGE | 18/24/32W |
| LUMEN | 1440/1920/2560lm |
| VOLTAGES | 120V/277V/120-277V |
| PF | >0.98 |
| BEAM ANGLE | 60°, 90° OPTIONAL |

DIMENSIONS

